

DuraSystem®

Mounting instructions

安装说明

Wall carrier

隐藏式水箱

WD1037000021
WD1037000071



Important information

4

重要说明

5



安装, Installation

6



Important information

The mounting instructions come as part of the Duravit product and must be read carefully prior to installation.

Target readership and qualifications

The toilet frame may only be installed by a qualified plumber. The electrical installation should only be carried out by qualified electricians.

Explanation of the key words and symbols



Indicates a hazardous situation which, if not avoided, will result in death or serious injury.



Link to the **mounting instructions** in this section



Link to the **electrical installation** section



Link to other **instructions**



Cold water



Water installation



Inspect to check for leaks and leak-tightness

> Action required

Safety instructions

Health risk and potential product damage

- > Supply the toilet frame with tap water from the main water system.
- > Do not connect any waste water, grey water, industrial water, sea water or other untreated or semi-treated water.

Product and/or property damage

The breach of local and country-specific regulations and standards can cause damage to the product and/or property damage.

- > Observe the local installation regulations and any country-specific standards at all times.

SensoWash® shower toilet (optional)

Duravit recommends carrying out the preinstallation when subsequently installing the shower toilet.

- > Confirm the position of the water and power supply in advance.
- > Install the power supply line according to the technical instructions for the shower toilet.

Mounting instructions

1 Observing the position of the drain

- > Set the height of the cistern based on the position of the drain according to the technical drawing of the toilet.

Water connection	
Cold water	DN15(1/2")
Water pressure	0.07-0.75Mpa (10-109psi)
Water hardness	Max.2.4mmol/l (240ppm)



Risk of fatal electric shock

Contact with electricity can lead to an electric shock.

- > Carry out the electrical installation in accordance with the national, European and international directives and standards.
- > Install the power supply line according to the technical instructions for the shower toilet.
- > Connect the power supply only when the shower toilet is installed.



重要说明

本说明是Duravit产品的一部分，安装前请务必仔细阅读。

目标读者和安装人员资格

坐便器安装只能由有资质的水管工安装。
电气安装只能由资质的电工进行。

关键词与符号说明

! DANGER 表示如不避免将会导致死亡或严重伤害的危险情况

- 请参阅相应的安装说明
- 请参阅相应的电气安装说明
- 请参阅其他安装说明
- 冷水
- 水管安装
- 检查是否有泄漏及密封性是否良好

> 所需操作

安全说明

健康风险和可能导致的产品损坏

- > 水箱供水应接入主供水管道的自来水。
- > 请勿接入任何废水，混水，工业水，海水或其他未处理或半处理的水。

产品/财产损失

- 违反当地和所在国家/地区的规章条例和标准可能会导致产品损坏或财产损失。
- > 请务必遵守所在国家/地区的标准和当地安装规章条例。

SensoWash® 智能坐便器 (可选)

Duravit 建议安装智能坐便器之前，先进行预安装：

- > 提前确认水管连接和电源连接位置。
- > 根据智能坐便器的技术说明安装供电线路。




安装说明


1 提前规划坐便器的排污管位置





- > 根据排污管的位置，坐便器的技术图纸确认水箱安装高度。

给水	
冷水	DN15(1/2")
水压	0.07-0.75Mpa (10-109psi)
水的硬度	Max.2.4mmol/l (240ppm)

- ! DANGER** 有致命的触电风险
与电接触可能导致触电事故
- > 电气装应按照相关国家/地区，欧盟和国际指令和标准进行。
 - > 根据智能坐便器的技术说明书安装供电线路。
 - > 智能坐便器安装妥当后，接通电源。

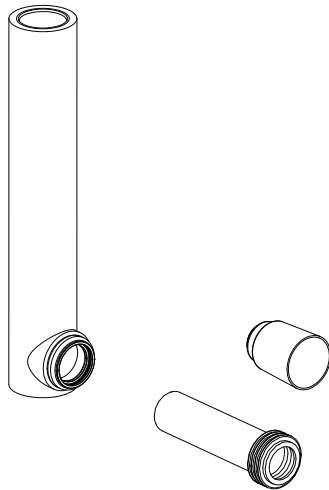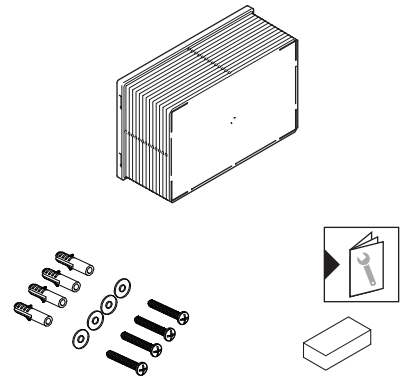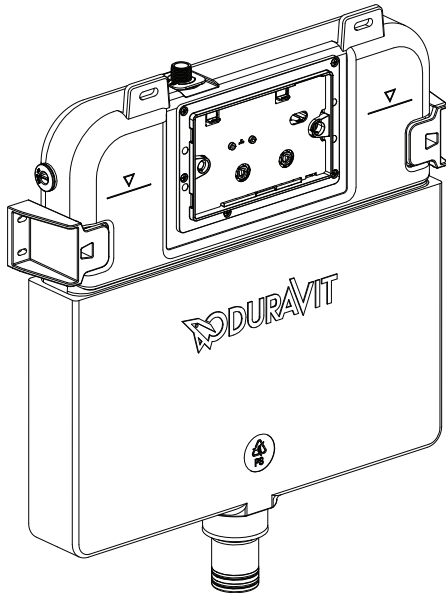


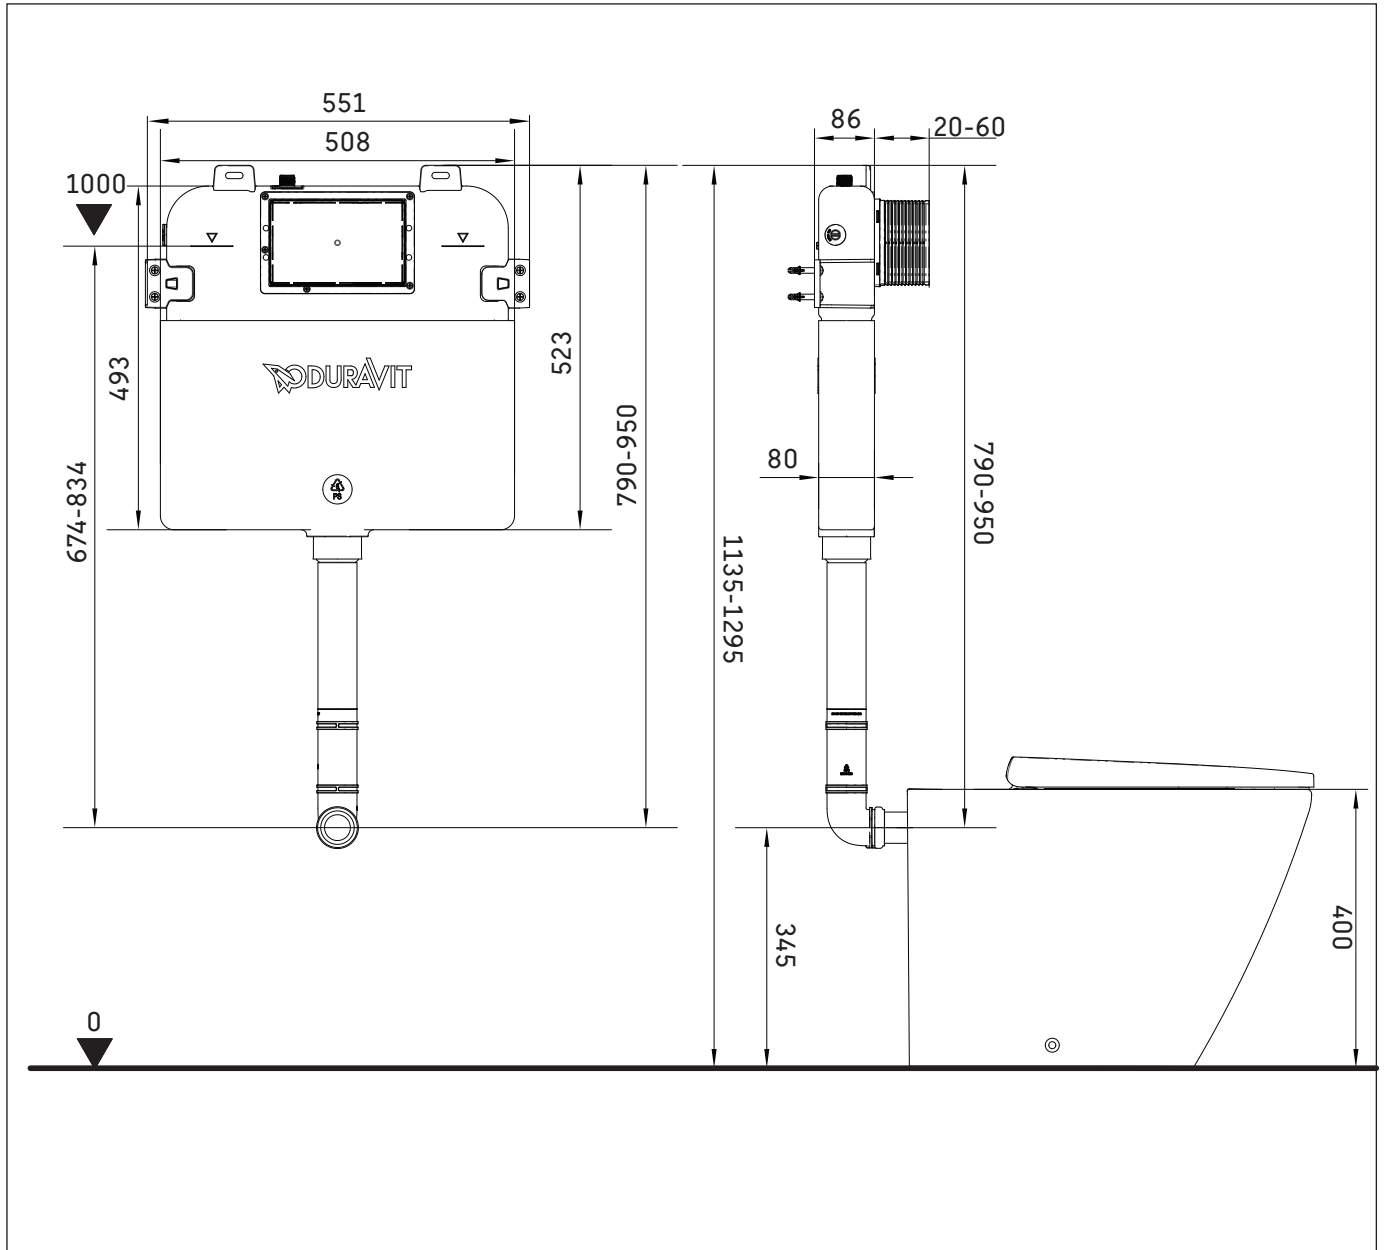

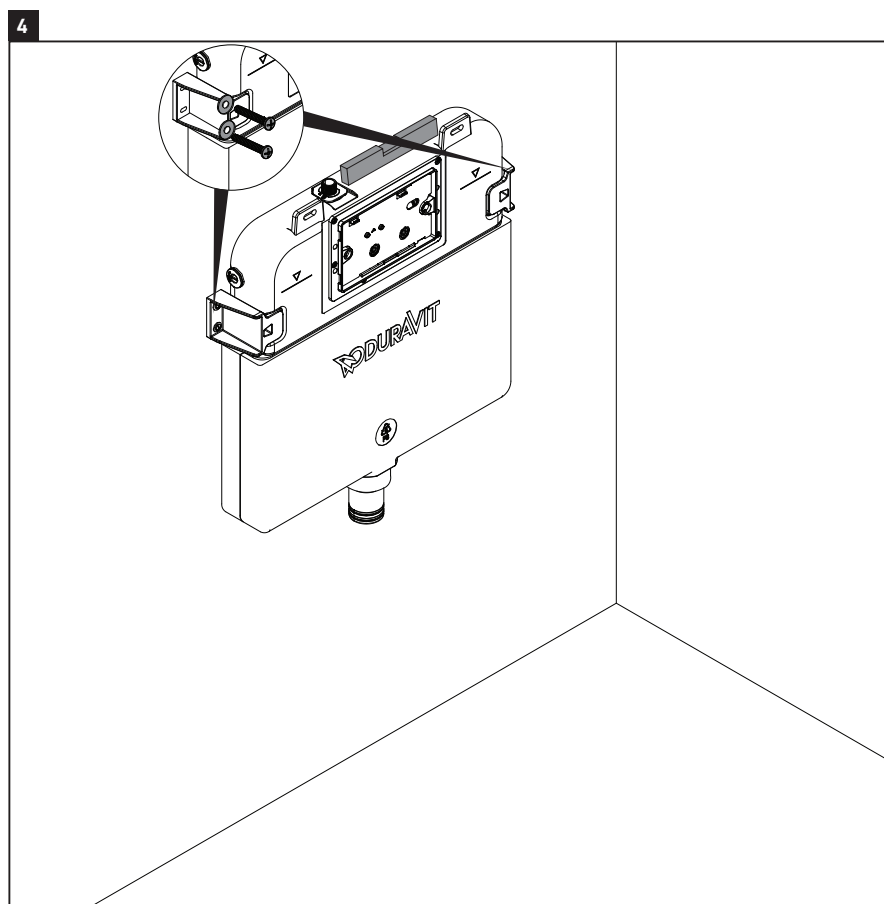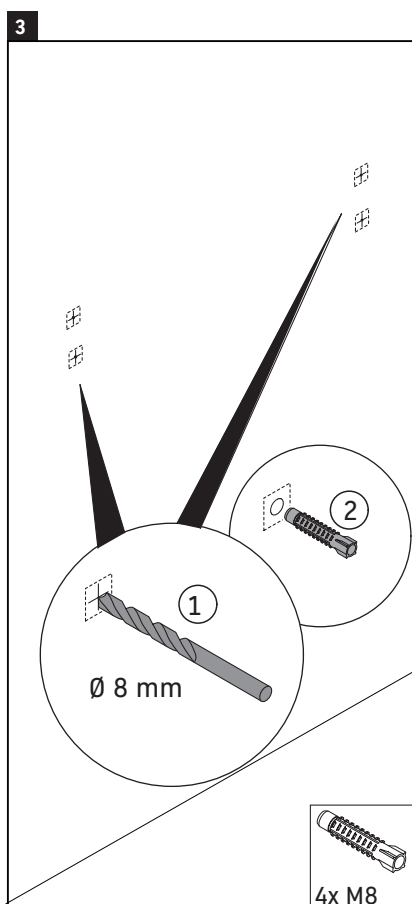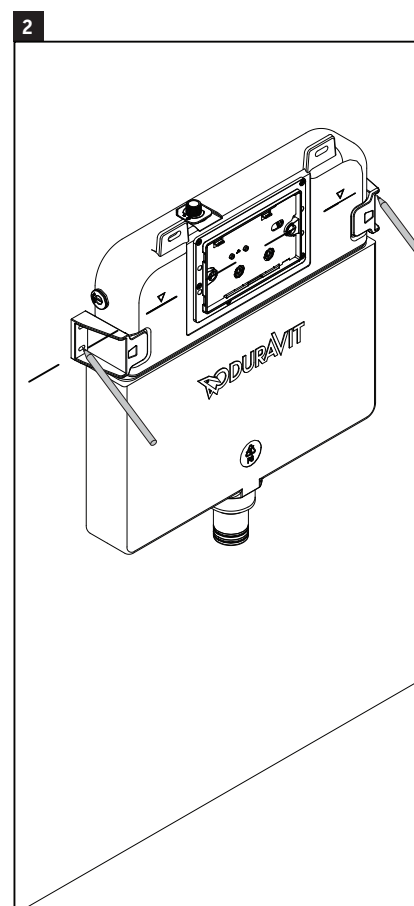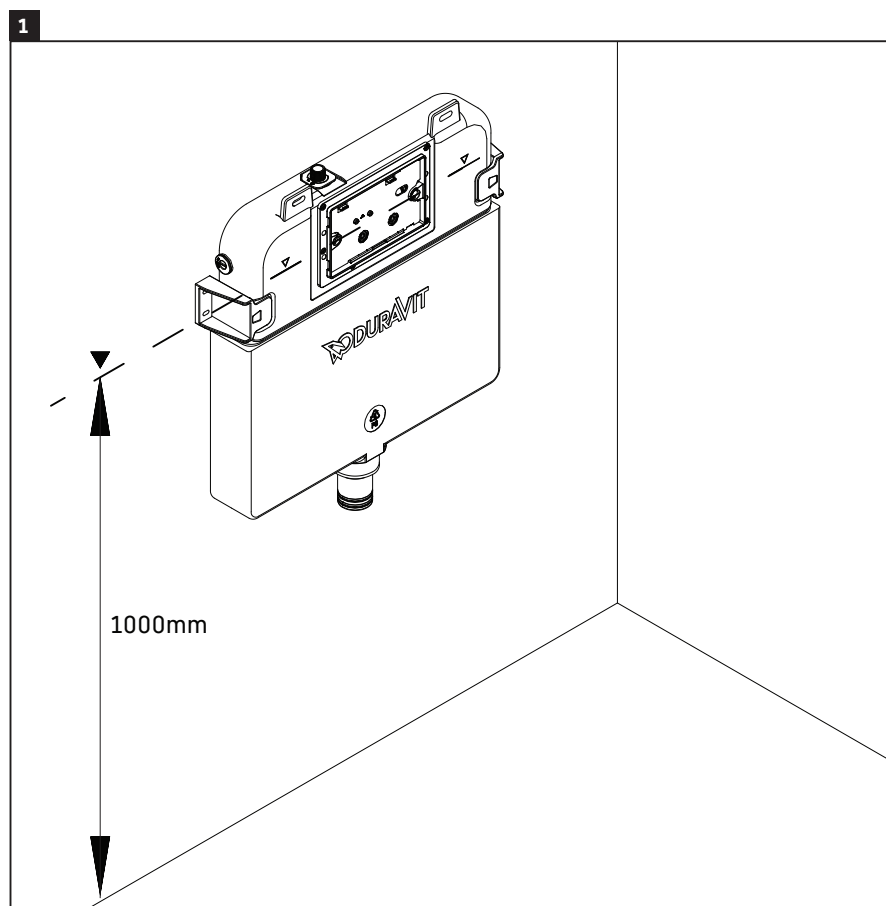





5

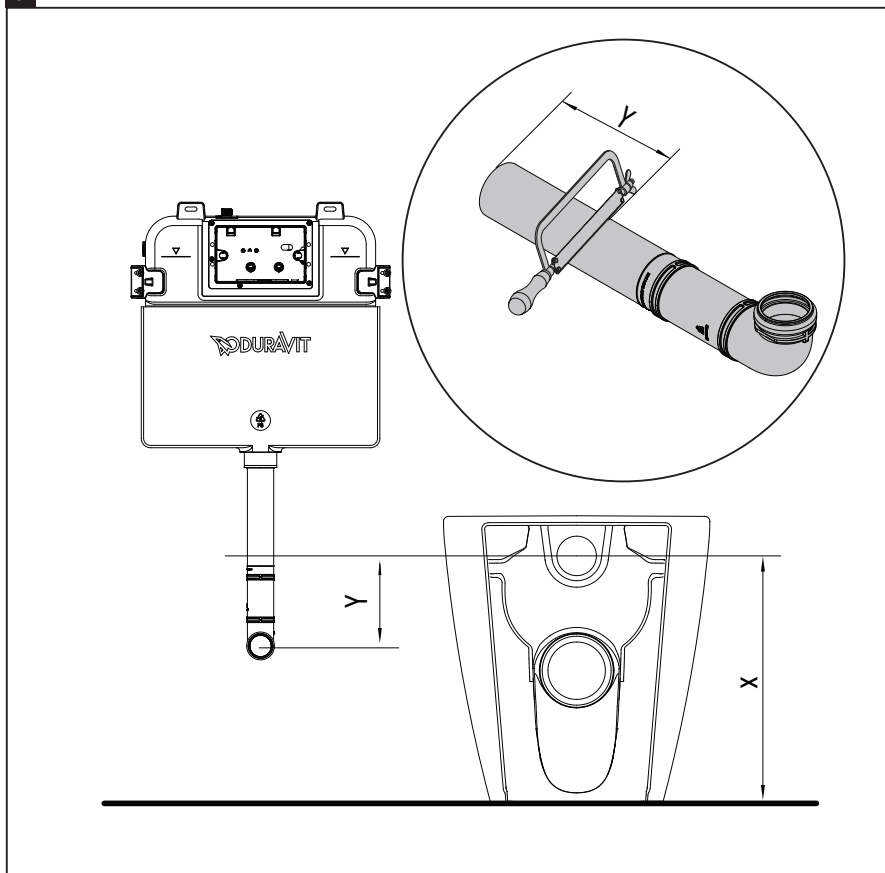


6

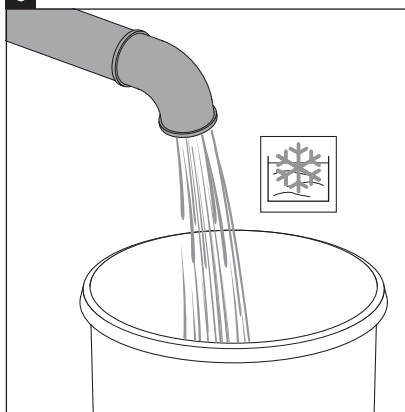


7

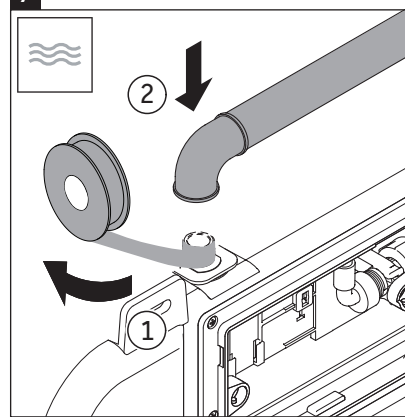


7





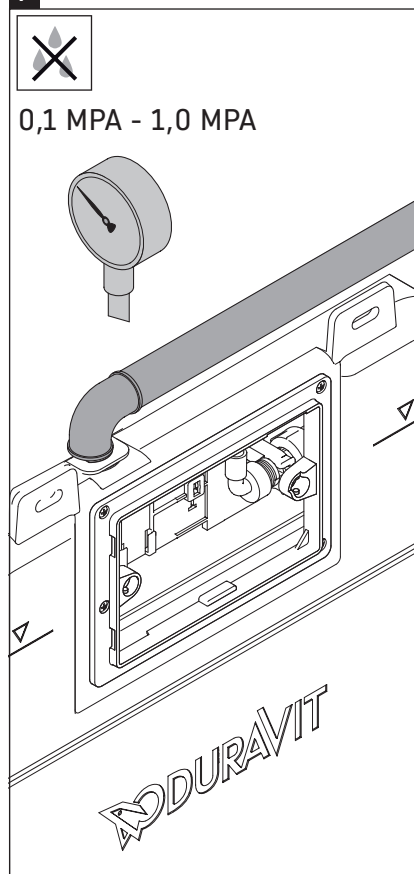


8

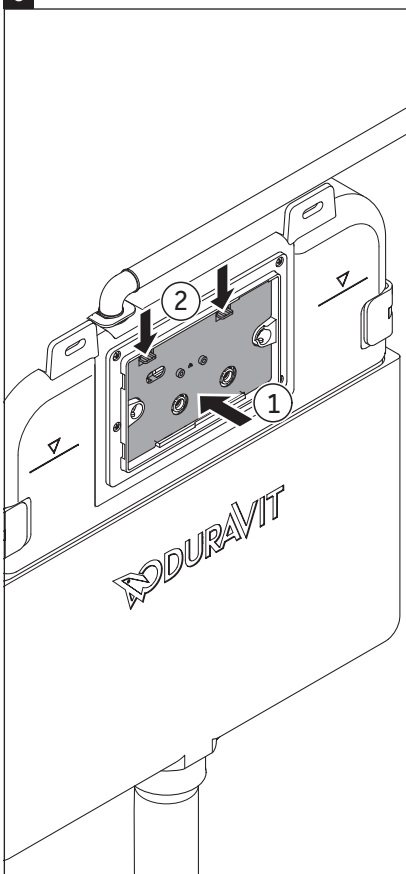

9

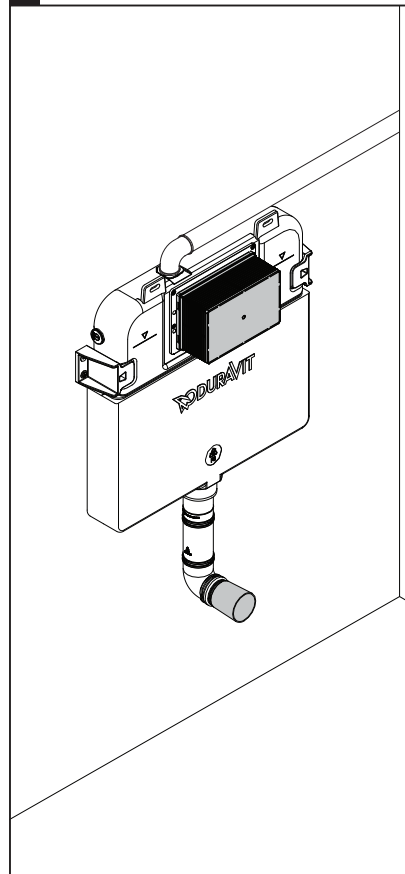

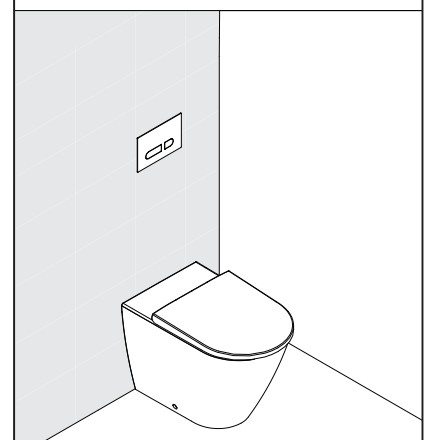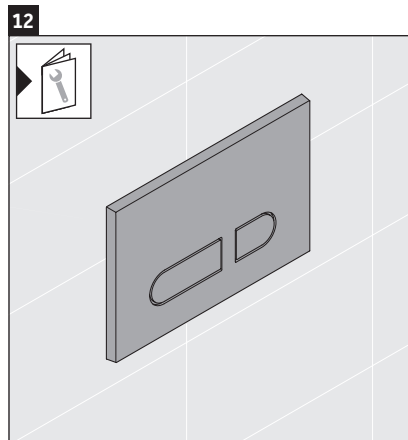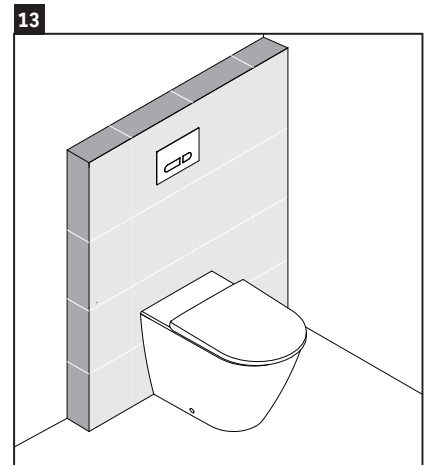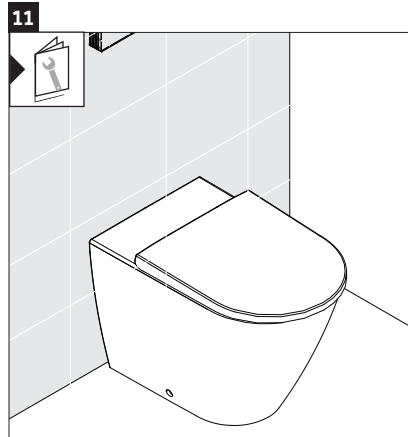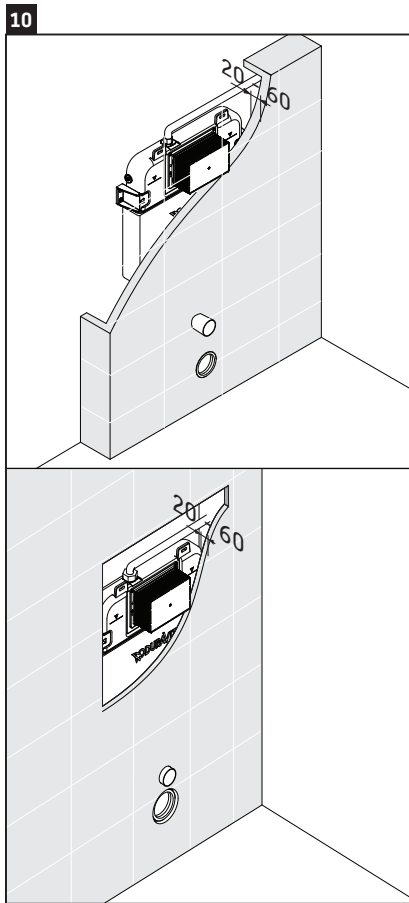

DURAVIT AG
P.O. Box 240
Werderstr. 36
78132 Hornberg
Germany
Phone +49 78 33 70 0
Fax +49 78 33 70 289
info@duravit.com
www.duravit.com

